



Floor standing
boilers

RMG AUS



The perfect solution for modular combinations

RMG AUS gas boilers are cast-iron made and are developed and manufactured in order to meet the demands of heating installations of middle and

high output, thanks to the possible connection of several generators. The RMG AUS line of boilers has a range of 65 to 95 kW of output.

Modular expansion

In order to better distribute the thermal charges on large surfaces such as a house and/or a commercial or industrial estate, it is possible to make modular configurations with several RMG AUS units. Up to two/three boilers in sequence complete with pumps/zone valves can be managed, as well as the preparation of an external D.H.W. tank.

Safety and versatility


The two-step combustion system of RMG AUS leads to a higher performance and reduces the thermal inertia.

The small dimensions, together with the possible reversibility of the hydraulic and gas connections facilitate the installation, even when the room available is a key factor.

Technical data

RMG AUS		65 E	75 E	85 E	95 E
Heat output	kW	45 - 65	52 - 75	60 - 85	66 - 95
Heat input	Mj/hr	195 - 280	225 - 320	250 - 360	280 - 400
Cast iron sections	no.	8	9	10	11
Absorbed electrical power	W	16	16	16	16
Water content	litres	27	30	33	36
Maximum water head	bar	3	3	3	3
Weight	kg	238	266	294	322

Overall dimensions - Hydraulic connections

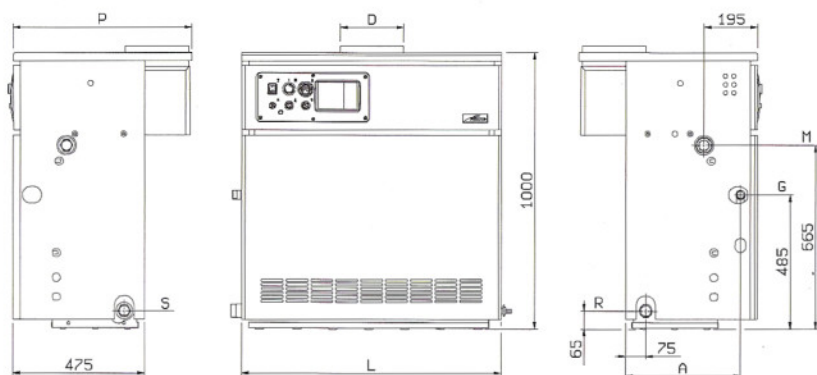

Dimensions

Model	P mm	D ø mm	L mm	A mm
65 E	645	180	840	415
75 E	645	180	940	415
85 E	645	200	1040	415
95 E	645	225	1140	415

Connections

M	C.H. flow	1 1/2"
R	C.H. return	1 1/2"
G	Gas	1"
S	Discharge	3/4"

We pursue a policy of continuing improvement in design and performance of our products. The right is therefore reserved to vary specifications without notice.



Hydronic Systems (Australia) Pty Ltd

P O Box 294 Braeside VIC 3195 ABN 50 354 796 935

showroom 11 Fiveways Boulevard Keysborough VIC 3173

phone 1300 00 1800 **fax** (+613) 9798 5133

email enquires@huntheat.com.au **website** www.huntheat.com.au